


# SHORE DUROMETERS




calibration block  
(optional)

- According to ISO868, ISO7619, ASTM D 2240
- With peak value indicator
- Optional accessory:  
test stand **ISH-STAC** and **ISH-STD**

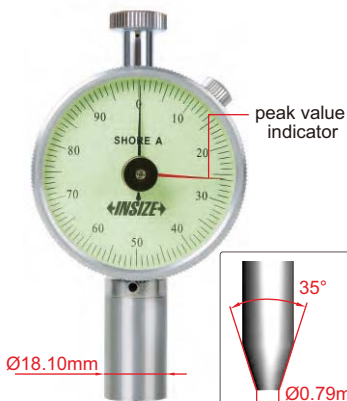

**ISH-SAM**

blunt taper  
indenter

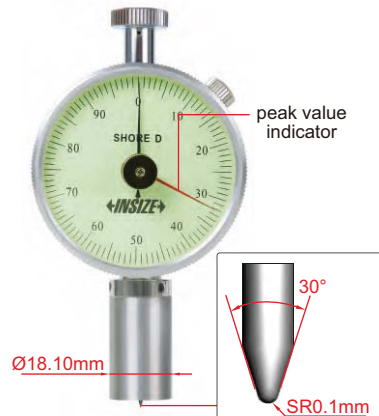

**ISH-SDM**

sharp point  
indenter

## SPECIFICATION

Code	ISH-SAM	ISH-SDM
Scale	Shore A	Shore D
Application	nature rubber, soft elastomer, etc.	hard rubber, plastic, hard elastomer, etc.
Measuring range *	10~90HA	20~90HD
Graduation	1HA	1HD
Indenter protrusion	2.5mm	
Dimension	115×60×25mm	
Weight	160g	

- \* Use **ISH-SDM** when measuring result is higher than 90HA  
Use **ISH-SAM** when measuring result is lower than 20HD

## OPTIONAL ACCESSORY

Calibration block	ISH-DS-BLOCK
-------------------	--------------



VIDEO