



DIGITAL READOUTS

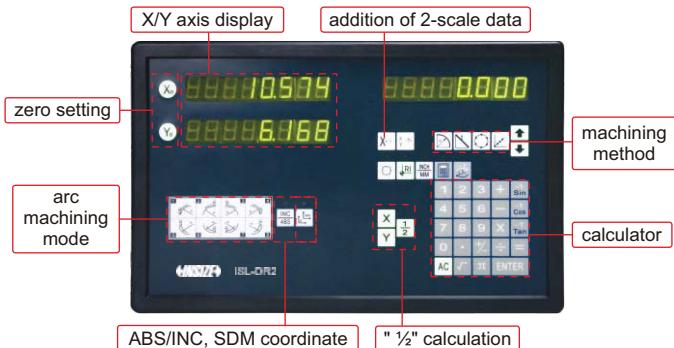

ISL-DR2

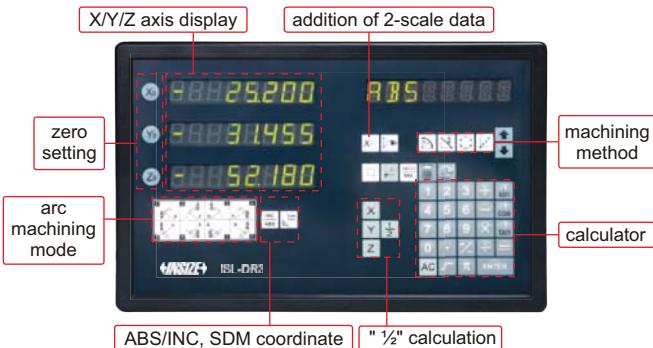

ISL-DR3

SPECIFICATION

| Code | ISL-DR2 | ISL-DR3 |
|-------------------|---|------------|
| Application | two-axis | three-axis |
| Scale input ports | 2 | 3 |
| Resolution | 0.05μm, 0.1μm, 0.2μm, 0.5μm, 1μm, 2μm, 5μm, 10μm, 20μm, 50μm | |
| Functions | addition of 2-scale data, linearity error compensation, smoothing, RS232C interface unit, BCD code out, zero setting, preset, resolution setting, counting direction setting, inch/mm conversion, ABS/INC conversion, expansion/contraction coefficient setting, "1/2" calculation, detecting RI, bolt-hole circle machining, ramp circle machining | |
| Power supply | 110/220V, 50/60Hz | |
| Dimension | 295×185×45mm | |
| Weight | 1.45kg | |

STANDARD DELIVERY

| | |
|------------------------|------|
| Main unit | 1 pc |
| Mounting bracket | 1 pc |
| Ground cable | 1 pc |
| RS232C cable | 1 pc |
| Software CD for RS232C | 1 pc |



software CD (included)



mounting bracket (included)

