


# OUTSIDE MICROMETERS (GRADUATION 0.005mm)

**INSIZE PLUS**

ATTENTION: SETTING  
STANDARDS ARE NOT INCLUDED



**3681-25**

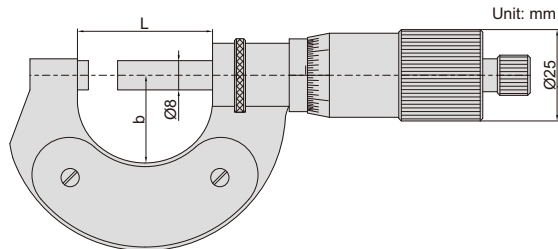

- Graduation 0.005mm
- Friction thimble
- One turn of sleeve makes 0.5mm spindle feed
- Carbide measuring faces
- Optional accessory: setting standards (code **7386**)

					(mm)
Code	Range	Accuracy	L	b	
<b>3681-25</b>	0-25mm	4μm	37	24	
<b>3681-50</b>	25-50mm	4μm	62	34	
<b>3681-75</b>	50-75mm	5μm	87	46	
<b>3681-100</b>	75-100mm	5μm	112	60	
<b>3681-125</b>	100-125mm	6μm	139	72	
<b>3681-150</b>	125-150mm	6μm	164	85	
<b>3681-175</b>	150-175mm	7μm	190	97	
<b>3681-200</b>	175-200mm	7μm	215	110	
<b>3681-225</b>	200-225mm	8μm	240	122	
<b>3681-250</b>	225-250mm	8μm	264	135	
<b>3681-275</b>	250-275mm	9μm	290	148	
<b>3681-300</b>	275-300mm	9μm	315	160	