



6882-600A

- To check the accuracy of table movements of machine tools and calibrate CMM
- Horizontal use and vertical use
- Constructed with ceramic gage blocks
- Can be used with stand
- Optional accessory: stand (code **6877**)


Standard accuracy

Code	Size	Step	A	B
6882-300A*	0-300mm	10mm	310mm	350mm
6882-400A*	0-400mm	10mm	410mm	450mm
6882-500A*	0-500mm	10mm	510mm	550mm
6882-600A*	0-600mm	10mm	610mm	650mm
6882-1000A*	0-1000mm	10mm	1010mm	1050mm

High accuracy

Code	Size	Step	A	B
6882-300H*	0-300mm	10mm	310mm	350mm
6882-400H*	0-400mm	10mm	410mm	450mm
6882-500H*	0-500mm	10mm	510mm	550mm
6882-600H*	0-600mm	10mm	610mm	650mm
6882-1000H*	0-1000mm	10mm	1010mm	1050mm

* Supplied with manufacturer inspection certificate

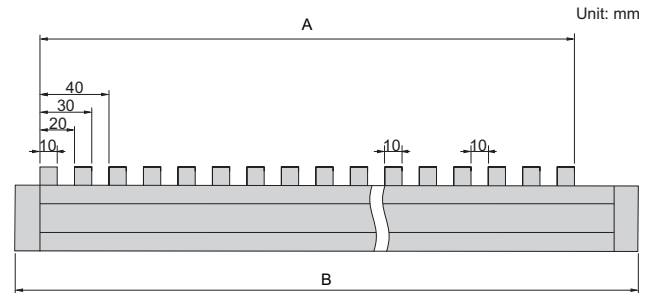

horizontal use

Accuracy

Range(mm)	Standard accuracy	High accuracy
≤300	±1.3μm	±0.8μm
>300, ≤400	±1.6μm	±1.0μm
>400, ≤500	±2.0μm	±1.0μm
>500, ≤600	±2.5μm	±1.0μm
>600, ≤800	±3.0μm	±2.5μm
>800, ≤1000	±4.0μm	±2.5μm



can be used with stand